


BA-5312/U

- An alternative for the BA-5112/U but with 82.6% more capacity.
- High performance non-rechargeable Lithium Manganese Dioxide battery. Durable high impact plastic housing
- Gold plated contacts
- Unit contains safety vented cells

This battery meets the requirements of MIL-PRF-49471 for:

- Battery voltage
- Capacity test
- Electrolyte leakage
- Mechanical and thermal shock
- Vibration
- Insulation resistance

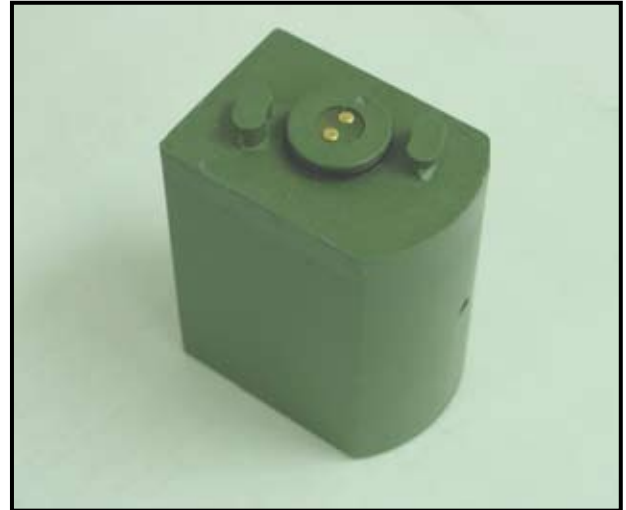

For use in	AN/PRC-112 SURVIVAL RADIO, PRC-112, KY913 PROGRAM LOADER.
NATO Stock Number	NSN: 6135-01-506-6921
Replacement for	BA-5112/U
Cell chemistry	Lithium Manganese Dioxide
Nominal voltage	12.0Volts
Typical Capacity	4.2Ah
Nominal dimensions	76.45 x 57.4 x 39.36mm per MIL-PRF-49471/10
Nominal Weight	272 grams
Connector	2 contacts, gold plated as per MIL-PRF-49471/10
Case material	ABS plastic, NATO green
Operating temperature	-20°C to +60°C
Disposal	Check with local regulations