




# Portable Power Pack - 30 Watt

The 30 watt Portable Pack is a solar-energized power generator for your mobile power needs. Incorporating solid state, thin-film, PowerFLEX™ solar cells, the 30 watt UnatSolar solar panel provides an excellent choice for applications that require lightweight, flexible, durable, silent power.


## Product Specifications

Electrical Characteristics*	
Nominal System Voltage Rating	12V
Nominal Rated Power (watts) at STC	30
Nominal Rated Voltage at MPP (VDC) at STC	18.8
Nominal Rated Current (amps)	1.5
Open Circuit Voltage (volts)	28
Short Circuit Current (amps)	2.2
Thermal Characteristics	
Power (%/C)	-0.5
Voltage (%/C)	-0.5
Cell Temperature Operating Range	-40° F to 176° F/ -40° C to 80° C
Dimensions and Weight	
Folded	
Length, in (mm)	10.5 (257)
Width, in (mm)	8.5 (216)
Thickness, in (mm)	1.2 (30.5)
Deployed	
Length, in (mm)	44 (1118)
Width, in (mm)	21 (533)
Thickness, in (mm)	0.1 (2.5)
Weight	
Weight, lb (kg)	2.4 (1.1)
Power to weight ratio watt/lb (watt/kg)	12.5 (27.3)

\*Data at Standard Test Conditions (STC)  
STC: irradiance level 1000W / m<sup>2</sup>, spectrum AM 1.5 and cell temperature 25° C

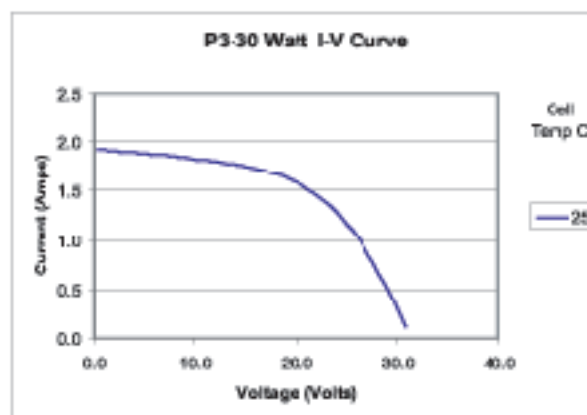

The I/V graph above shows the typical performance of the solar module at STC

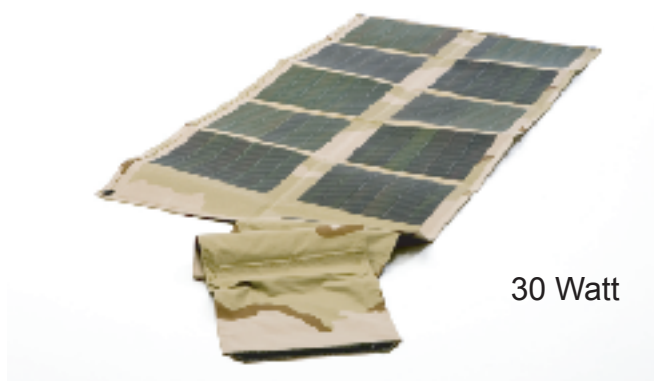

30 Watt